

PolyGard® Phosgene COCl₂ Transmitter ADT63 1147

DESCRIPTION

COCl₂ transmitter including digital measurement value processing and temperature compensation for the continuous monitoring of the phosgene concentration in the ambient air. A comfortable calibration routine with selective access release is integrated in the transmitter. The ADT-X3 possesses a standard analog output (0) 4-20 mA or (0) 2- 10 V DC, and an RS-485 interface. 2 relays with adjustable switching thresholds are available as an option.

APPLICATION

For the detection of phosgene within a wide range of industrial and commercial applications. Due to the standard analog signal and the RS-485 interface the COCl₂ transmitter is compatible to the PolyGard series MGC and DGC by MSR-E as well as to any other electronic control or automation system.



Standard enclosure

FEATURES

- Digital measurement value processing incl. temperature compensation.
- Continuous monitoring
- Low zero-point drift
- Poisoning stable
- Long life sensor
- Modular plug-in technology
- Easy maintenance
- Comfortable calibration with selective access release
- Reverse polarity protected, overload and short-circuit proof
- (0) 4 - 20 mA / (0) 2 – 10V analog signal output, selectable
- Serial interface RS-485
- IP65 protected
- Manual calibration via potentiometer (option)
- Manual addressing for RS-485 mode (option)
- 4 – 20mA analog input for external transmitter (optional)
- Approved according to EN 61010-1; ANSI/UL 61010 1; CAN/CSA-C22.2 No. 61010-1
- Relay output (optional)
- Integrated buzzer (optional)
- LED flashlight (optional)
- LCD display (optional)
- LED status display (optional)
- Heating (optional)
- Duct mounting (optional)



SPECIFICATIONS

General sensor performance

Detected gas	Phosgene (COCl ₂)	
Sensor element	Electrochemical, diffusion	
Measuring range	0 – 1 ppm	
Temperature range	-20 °C to + 40 °C (-4 °F to 104°F) w/o heating	
Pressure range	Atmospheric ± 15 %	
Humidity range	15 – 90 % RH non-condensing	
Storage temperature	5 °C to 30 °C (41 °F to 86 °F)	
Storage time	Max. 3 months	
Mounting height	200 to 300 mm above floor (0.66 to 1 ft)	
Accuracy	0.1 ppm	
Repeatability	< 2 % of reading	
Long term output drift	< 5% signal loss/month	
Response time	t ₉₀ ≤ 120 s	
Sensor life expectancy	> 1 years, normal operating environment	
Cross sensitivity ¹	Concentration (ppm)	Reaction (ppm)
Ammonia, NH ₃	100	0
Arsenic, As	0.2	0.18
Carbon dioxide, CO ₂	5000	0
Carbon monoxide, CO	100	0
Chlorine, Cl ₂	1	0.4
Chlorine dioxide, ClO ₂	1	-3
Hydrogen chloride, HCL	10	25
Hydrogen sulphide, H ₂ S	20	yes
Isopropanol, C ₃ H ₈ O	1100	0
Methane, CH ₄	1 %	0
Nitrogen dioxide, NO ₂	10	- 1

Electrical

Power supply	18 - 28 VDC/AC, reverse polarity protected (2-wire mode only VDC)
Power consumption (without options)	
- Analog mode	22 mA, max. (0,6 VA)
- Bus mode	12 mA, max. (0,3 VA)

Output signal

Analog output signal	(0) 4 – 20 mA, load ≤ 500 Ω,
Selectable: Current / tension	(0) 2 – 10 V, load ≥ 50 k Ω
Starting point 0 / 20 %	proportional, overload and short-circuit proof

Serial interface

Transceiver	RS 485 / 19200 Baud (9600 at Mod_Bus)
Protocol	Depending on version

Physical characteristics

Enclosure Plastic Type A ²	Polycarbonate
Flammability	UL 94 V2
Enclosure color*	RAL 7032 (light grey)
Dimensions (W x H x D)	94 x 130 x 57 mm (3.7 x 5.12 x 2.24 inch.)
Weight	Approx. 0.5 kg (1.1 lbs.)
Protection class	IP 65
Installation	Wall mounting
Cable entry	Standard 1 x M 20
Wire connection	Screw type terminal, min. 0.25 mm ² (24 AWG) max. 2.5 mm ² (14 AWG)
Wire distance	Current signal: ca. 500 m (1500 ft) Voltage signal: ca. 200 m (600 ft.)

GAS ALARM SYSTEMS


Guidelines	EMC Directives 2004/108/EC EN 61010-1:2010 ANSI/UL 61010-1 CAN/CSA-C22.2 No. 61010-1 CE
Warranty	One year on material (without sensor)
Options	
Relay output	
Alarm relay 1	30 VAC/DC, 0.5 A, potential-free, SPDT
Alarm relay 2	30 VAC/DC, 0.5 A, potential-free, SPNO/SPNC
Power consumption	30 mA, (max 0.8 VA)
Warning buzzer	
Acoustic pressure	85 dB (distance 300 mm) (1 ft)
Frequency	3.5 kHz
Power consumption	30 mA, (max 0.8 VA)
LCD display	
LCD	Two lines, 16 characters each
Power consumption	10 mA, (max 0.3 VA)
LED indicator	
Green-yellow-red	Supply, low alarm, high alarm
Power consumption	10 mA, (max. 0.3 VA)
Heating	
Temperature controlled	3 °C ±2°C (37.4 °F ± 3.6 °F)
Ambient temperature	- 40 °C (- 40 °F)
Power consumption	0.3 A; 7.5 VA
Analog input	
Only for RS-485 mode	4 – 20 mA overload and short-circuit proof, input resistance 200 Ω
Power supply for external transmitter	24 VDC, max. 50 mA

¹ The table doesn't claim to be complete. Other gases can have an influence on the sensitivity, too. The mentioned cross sensitivity data are only reference values valid for new sensors.

² For further enclosure types see datasheet "ADT Enclosures".

ORDERING INFORMATION

ADT-63-1147-X-XXXXXXXXXX

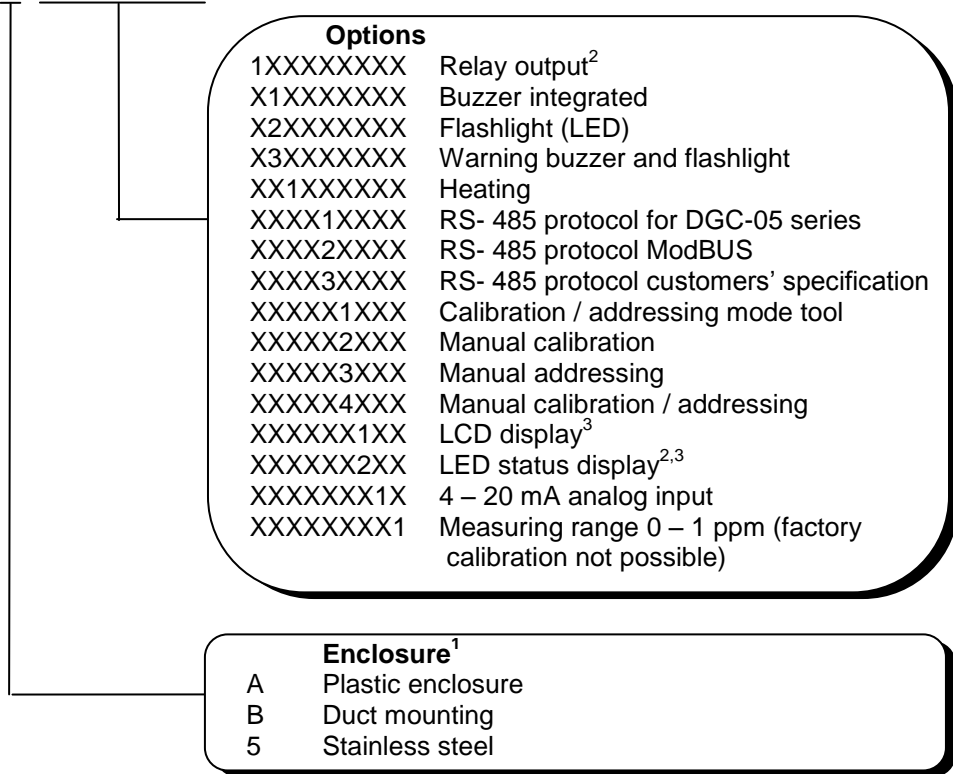

¹ See Data sheet "PolyGard ADT Enclosure"

² Please indicate thresholds for low and high alarm when ordering.

³ Not in connection with stainless steel housing, not in connection with option Relay or RS-485 interface

Example: Phosgene transmitter, stainless steel housing, calibration tool, factory calibration 0 – 1 ppm

Ordering No.: ADT-63-1147-5-XXXXX1XX1

CONNECTING DIAGRAM

